

AXKID ZERO



User manual

Table of content

Safety information.....	3
Placement in car.....	4
Product overview.....	5
Adjustments.....	7
Securing your child.....	10
Installation using vehicle seat belt.....	13
Install AXKID ZERO on ZERO Base.....	15
Care and maintenance.....	17
Warranty.....	19
Recycling.....	20

Safety information

Read this instruction manual before installing the AXKID ZERO in the vehicle.

AXKID ZERO is a rearward-facing infant carrier and infant car seat. It is suitable for children of 40–87 cm and up to 13 kg.

AXKID ZERO is part of Axkid's modular system and can be used with the **AXKID ZERO Base** in the vehicle. It can also be used without the base.

This is a Universal Belted Enhanced Child Restraint System. It is approved according to UN Regulation No. 129, for use primarily in "Universal seating positions" as indicated by vehicle manufacturers in the vehicle user's manual. If in doubt, consult either the Enhanced Child Restraint System manufacturer (www.axkid.com) or the retailer.



Warning: An incorrect installation may seriously affect the safety of the child.



Note: If you have any doubts, contact the retailer where the car seat was purchased or contact info@axkid.com

To maximize your child's safety, it is important that you keep the following in mind:


- For the latest version of the instruction manual, visit <https://axkid.com/manuals>.
- Always refer to the vehicle manufacturer's manual as well as this instruction manual when installing this child restraint.
- Ensure that the car seat is installed in a way where no parts become trapped by movable seats, car doors, etc.
- Do not use the car seat in a seating position where an active frontal airbag is fitted. To install the car seat in this location the airbag must be switched off according to the vehicle manufacturer's instructions.
- Never leave the child unattended in the child car seat nor inside the vehicle.
- Do not attempt to disassemble or modify any part of the child restraint. The warranty and the safety performance of the car seat could be affected by doing so.
- Do not alter the routing of the vehicle seat belt. Follow the seat belt routing instructions in this manual.
- In case of an accident, the car seat should always be replaced. It may have damage that is not visible and could seriously affect the safety of the child.
- Never use the car seat without the textile cover. The textile cover is a safety feature and may only be replaced with an Axkid original seat textile cover.
- Ensure that any luggage or loose objects are secured in the vehicle as they may cause injuries to passengers in the event of an accident.
- Protect the car seat from prolonged direct sunlight to avoid surface overheating that could burn the child.
- If the car seat has been exposed to direct sunlight, make sure the car seat is not too hot before securing the child.
- Make sure that the harness is properly fitted to the child's body, and that the harness straps are not twisted.
- Make sure there is no twist in the seat belt.
- Axkid recommends to always use a seat protection to protect the vehicle seat from scratches and dirt.
- Read the vehicle handbook and the vehicle list at www.axkid.com to find which seating positions are suitable for this car seat.

Placement in car

AXKID ZERO infant car seat can only be installed rearward-facing in a passenger seat which has a 3-point seat belt. It must not be used with a 2-point seat belt or in a passenger seat with an active airbag.

AXKID ZERO can also be used rearward-facing with the AXKID ZERO Base. AXKID ZERO Base must be installed using ISOFIX attachment points. It is approved for use in all i-Size approved seating positions but may also fit in other non i-Size approved ISOFIX seating positions.

Check the vehicle instruction manual and the vehicle list on <https://axkid.com/manuals> to find suitable seating positions.

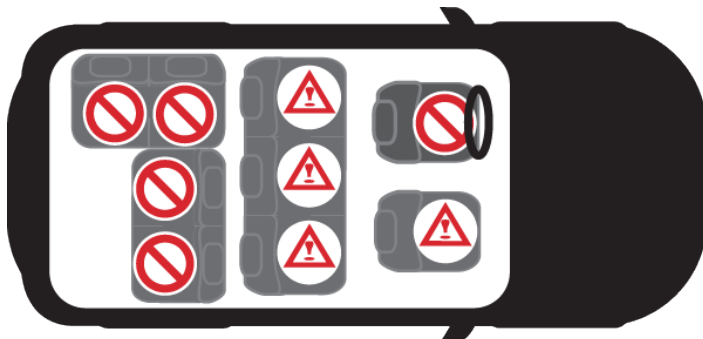

Front passenger seat with 3-point belt or ISOFIX (no active airbag)	YES*/NO**
Front passenger seat (active airbag)	NO***
Rear passenger seat with 3-point belt or ISOFIX	YES*
Seat with 2-point belt	NO
Side-facing and rear-facing seats	NO

* AXKID ZERO Base is required for installation using ISOFIX attachment.

**The General Regulation of Traffic in Spain, in its article 117, establishes the prohibition of driving with children of stature equal to or less than 135 centimetres located in the front seats of the vehicle, without exceptions.



Important: *** If you wish to install the AXKID ZERO in a location where a frontal airbag is fitted, the airbag must be deactivated according to your vehicle manufacturer's instructions. Note that some vehicles require an authorized service center to disconnect the airbag. Always check the vehicle's airbag indicator light to make sure that the airbag is deactivated.



Never install a child restraint in a passenger seat where an active airbag is fitted.



Product overview



(A) Handle

(B) Axkid Side Impact Protection pad (ASIP)

(C) Shell

(D) Handle button

(E) Side belt guides

(F) Fabric cover

(G) Headrest


(H) Shoulder pads

(I) Internal harness

(J) Newborn insert (for children between 40-60 cm)

(K) Harness adjuster

(L) Harness adjustment strap

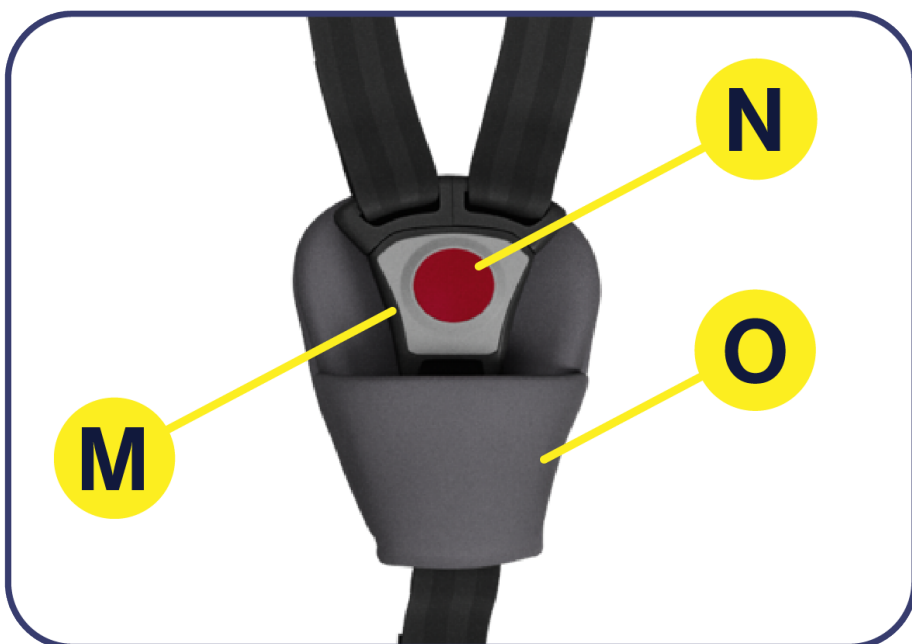

(M) Buckle

(N) Buckle release button

(O) Crotch pad



(P) Headrest adjustment handle

(Q) Rear belt guide

Adjustments

Adjusting the handle

To adjust the position of the handle (A), press the handle buttons (D) on both sides of the handle and rotate the handle to the desired position (see available positions below).

Handle positions

1. In vehicle position
2. Carry position

3. Stow position
4. Steady position



Warning: The handle is a safety feature and must ALWAYS be used in the vehicle position (Pos. 1) when the AXKID ZERO is used in the vehicle.

Adjusting the headrest

The AXKID ZERO has an adjustable headrest that allows you to move the headrest to the best possible position for your child.

To adjust the headrest (G), first press the harness adjuster (K) and extend the internal harness (I) as much as possible.

Then pull the headrest adjustment handle (P) on the back of the headrest (G) and adjust the height of the headrest by moving it upwards or downwards.




Operating the harness buckle

Opening the harness buckle



Press the buckle button (N). The lock tongue of the buckle will spring up and separate into two.

Closing the harness buckle

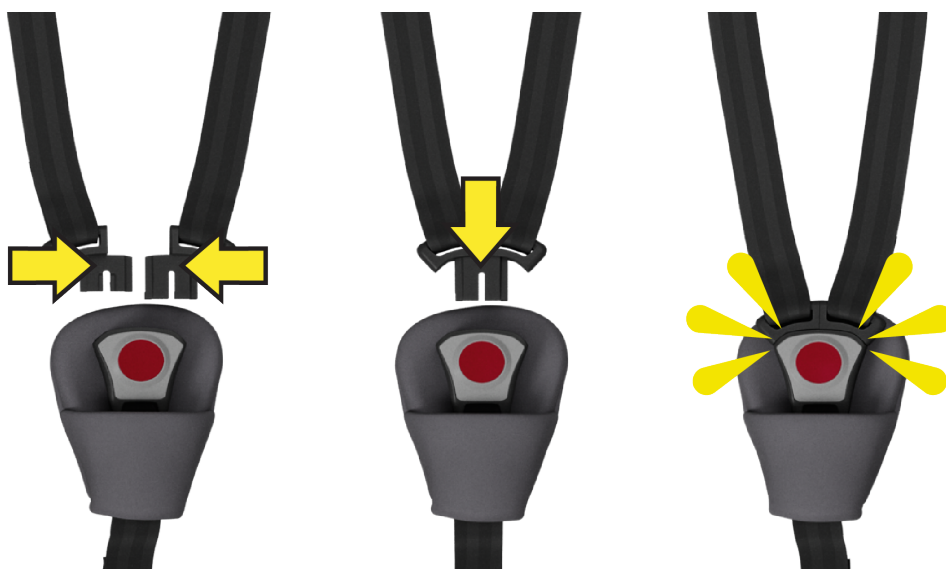

Connect the two harness straps by pressing the two buckle tongues together. Then insert them into the buckle (M). The buckle will make a click sound when it locks.

Securing your child

AXKID ZERO is designed for children of a height between 40-87 cm and a maximum weight of 13 kg.

Make sure to use the **newborn insert (J)** with AXKID ZERO if your child is in the newborn height range, see table below.

Child height	Use
40–60 cm	Newborn insert
61–87 cm	No newborn insert

Secure your child in AXKID ZERO

Prepare the carrier




Press the harness adjuster (K) and pull out the internal harness (I) as much as possible.

Open the buckle (M) by pressing the buckle release button (N).

Open up the internal harness (I), placing the straps to the side and the crotch pad (O) with the buckle side facing downward.

Secure the baby in the carrier

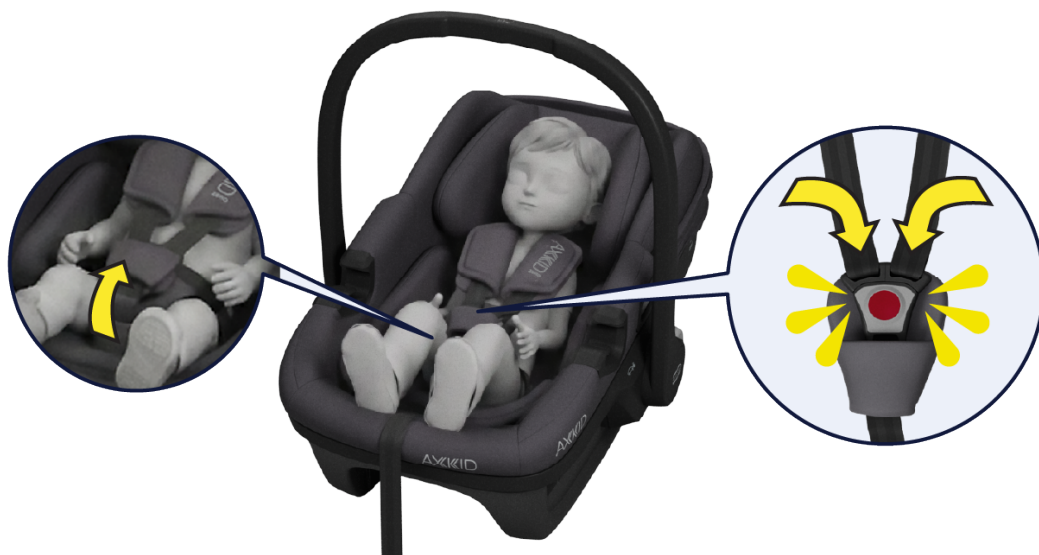

Place the baby in the carrier. Place the crotch pad (O) between the child's legs.

Close the buckle (M) by joining the 2 buckle tongues together and then inserting them into the buckle.



Note: When the child's height is between 40 and 60 cm, the newborn insert (J) must be used.

Adjust the harness



Pull the harness adjustment strap (L) to tighten the harness.

Note:



- A gap of about 2 fingers between the internal harness (I) and the child's body is appropriate.
- Make sure the internal harness (I) is not twisted.

Figure 1. Correct harness position



To achieve a correct harness position, the headrest (G) might need adjustments. See the chapter [Adjusting the headrest \(on page 8\)](#) for instructions.

Installation using vehicle seat belt

AXKID ZERO can be installed directly on the vehicle seat using the vehicle seat belt.

To install AXKID ZERO on the AXKID ZERO seat base, refer to the chapter [Install AXKID ZERO on ZERO Base \(on page 15\)](#).


Warning:



- Only install AXKID ZERO on vehicle seats equipped with 3-point seat belts.
- Do not use any other load-bearing points other than those described in this manual and marked on the child restraint system.




Note: If you have any doubts, consult the retailer where the car seat was purchased or contact info@axkid.com.

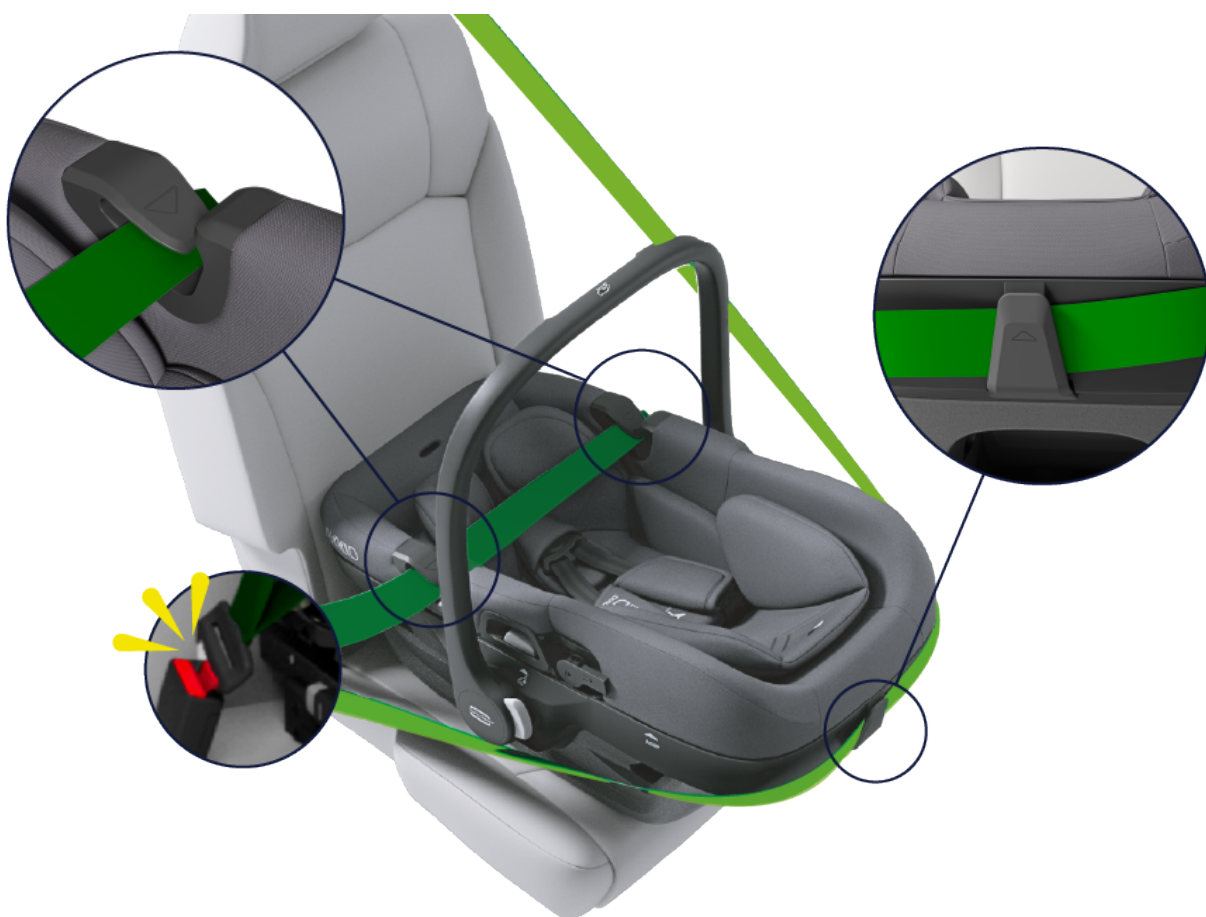

1. Adjust the handle (A) to carry position.
2. Position the infant car seat on the vehicle seat. Refer to the chapter [Placement in car \(on page 4\)](#) to see which vehicle seats are allowed.
3. Pass the vehicle lap belt through the side belt guides (E) and fasten the vehicle seat belt buckle.
4. Route the vehicle shoulder belt through the rear belt guide (Q) of the infant car seat.

5 Adjust the handle

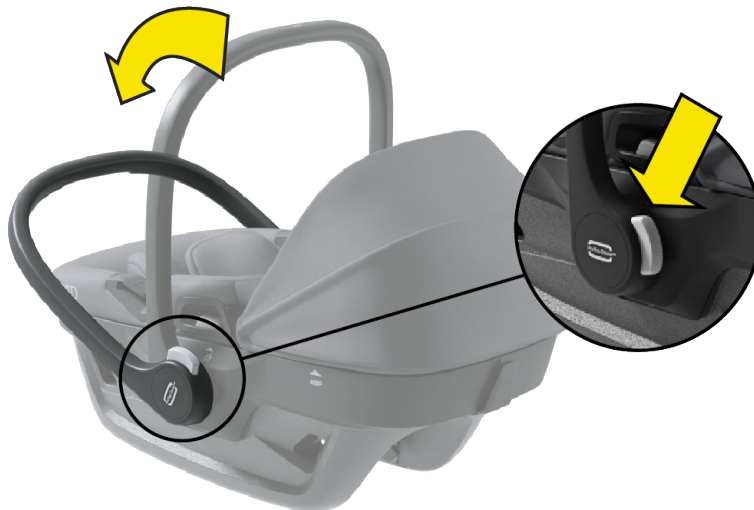

Press the handle buttons (D) on each side and adjust the handle (A) to in vehicle position.

6 Attach the ASIP pad



Attach the ASIP pad (B) to the side of the infant car seat that is closest to the car door.

Install AXKID ZERO on ZERO Base



Note: Refer to the AXKID ZERO Base user manual for installation instructions and important information about using the AXKID ZERO Base.

4

Install infant car seat on base




Place the infant car seat on the seat base and push down until the car seat attachments of the base are fully engaged.

After a correct installation, the car seat installation indicators on both sides of the seat base will display green. Lift the infant car seat to check that the installation is secure.

5

Adjust the handle

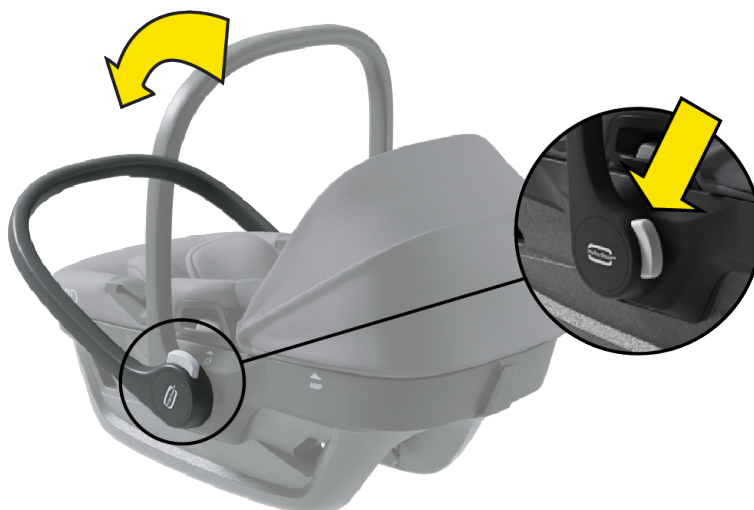

Press the handle buttons (D) on each side and adjust the handle (A) to in vehicle position.

6

Attach the ASIP pad



Attach the ASIP pad (B) to the side of the infant car seat that is closest to the car door.

Care and maintenance

- The seat textile cover can be machine washed at 30° C on a gentle cycle. Do not put the cover in a dryer as this can damage the cover and the padding may separate from the fabric.
- If the textile seat cover needs replacing, ensure only original products from Axxkid are used. If other products are used, the Axxkid car seat's safety system may be compromised and could lead to severe injury in case of an accident.
- Any plastic parts of the Axxkid can be cleaned with mild detergent and water. Do not use aggressive chemicals containing solvents or similar, as this can cause damage to the plastic and compromise the safety of the child carrier.
- Do not make any modifications or alterations to the Axxkid other than those described in this instruction manual.
- Any repairs must be carried out by the manufacturer or agent.
- Handle the with care and clean it regularly for maximum durability.
- Regularly check the child carrier for damage. If there are any abnormalities, contact the retailer where it was purchased or reach out to Axxkid directly.
- Avoid exposing the child carrier to direct sunlight.
- Do not dry the seat textile covers in the sun.

Removal and installation of fabric cover

Removal of the canopy units



1. Tear off the Velcro on the canopy from the back.



2. Collapse the canopy, starting at the back.



3. Pull out the canopy pole from the canopy base.

4. Pull the canopy pole out of the canopy.

Removal of the crotch pad and headrest cover



1. Remove the crotch pad (O) by threading it off of the buckle.



2. Take the internal harness (I) out of the shoulder pads (H). Detach the bottom part of the headrest (G) from its attachment.



3. Slide the headrest upwards off of its attachment.

Removal of the shell fabric cover



1. Remove the fabric cover (F) from the side of the belt guide (E)



2. Tear off the Velcro on the fabric cover from the back.



3. Grasp the fabric cover (F) from both ends and lift it upwards off of the carrier shell (C).

Installing the fabric cover

To install the fabric cover, follow the steps to remove the fabric cover in reverse.

Warranty



CAUTION: Handle the car seat with care. Never carry the seat by holding in the headrest!

The Axkid car seat is covered by a 24 month warranty from the date of purchase. Bring the receipt to the place of purchase in case of warranty claims.

The warranty does not cover

- Normal wear and tear.
- Damage due to incorrect use, neglect, or accident.
- If repairs have been carried out by a third party.
- All materials used have a very high UV resistance rating. However, UV light is very aggressive and will eventually cause the seat cover to fade, which is considered normal wear and tear.

Recycling

Axkid strongly recommends recycling of old car seats. Before leaving the car seat at the local recycling station, cut off any harness straps from the seat, remove the textile cover, remove as many Styrofoam parts as possible, separate metal and plastic parts if possible. The main part of the car seat should be marked unsafe or expired (use a marker) to deter anyone from using it again. Please follow the local municipal guidelines for recycling instructions for the different materials.



AXKID

© Copyright Axkid 2026
All rights reserved Axkid AB | Göteborgsvägen 94 | 43137 Mölndal | Sweden
AUGUST 2026 Art.no 1109095